

RUEP: Electro-pneumatic relay

How energy efficiency is improved

The compressed air consumption in installations can be reduced by selectively switching off pneumatic control equipment when not in use.

Areas of application

Relay for use in pneumatic control systems.

Features

- Electromagnetic switching valve
- Valve body made of brass, valve disc with soft seal made of Viton
- Cable clamping sleeve for cables $\varnothing$ 6 -7 mm and wires up to 1.5 mm²
- Compressed air connection on upper part of valve G $\frac{1}{8}$ " A, male thread
- Complies with directive 97/23/EC Art. 3.3 on pressure equipment

Technical description

- Power supply 24 or 230 V~
- Leakage rate ($\Delta p = 1$ bar) 0.6 l/h
- Permissible operating time 100%



Y03184

Type	Flow rate ¹⁾		Connector	Voltage	Weight
	m ³ /h		thread		kg
RUEP 5 F001	6,3		Rp $\frac{1}{8}$	230 V~	0,34
RUEP 5 F002	6,3		Rp $\frac{1}{8}$	24 V~ ²⁾	0,34
Control voltage	230 V~	$\pm 15\%$, 50...60 Hz	Permissible ambient temp.		0...55 °C
	24 V~	$\pm 20\%$, 50...60 Hz	Permissible amb. humidity		< 90 %rh
Power consumption	5 W (5,5 VA)		Degree of protection		IP 65 (EN 60529)
Permissible pressure or differential pressure	1,7 bar		Connection diagram		A04522
Leakage rate ($\Delta p = 1$ bar)	0,6 l/h		Dimension drawing		M04531
Permissible duty cycle	100%		Fitting instructions		MV 505371

Accessories

- [0274469 000*](#) Screw-type bracket of polyamide with R $\frac{1}{8}$ male thread
- [0277717 000*](#) Screw fitting of polyamide with R $\frac{1}{8}$ male thread
- [0296931 000*](#) Adaptor with female thread Rp $\frac{1}{8}$
- [0296936 000*](#) Fixing bracket for rail EN 60715-35 $\times$ 7,5 and 35 $\times$ 15
- [0296937 000*](#) Fixing clip for rail C EN 60715-C 20
- [0296938 000*](#) Bracket for wall mounting
- [0381140 001*](#) Screw fitting of polyamide with Rp $\frac{1}{8}$ female thread

*) Dimension drawing or wiring diagram are available under the same number

1) Flow of air at 1 bar with respect to atmosphere

2) Also suitable for 24 V~, $\pm 20\%$

Operation

The alternating current connected to the unit is converted by the integrated rectifier into d.c. for the solenoid.

Solenoid energised: passage A-P open
A-R closed


Solenoid de-energised: passage A-R open
A-P closed

Engineering and fitting notes


Because of the self-heating properties of the electropneumatic relay, especially in panels at the upper connector R, the material used for the plastic tubing should be suitable for use in temperatures of at least 80 °C (e.g. polyamide).

 Do not touch the relay while it is in use or just after it has been switched off.








Wiring diagram

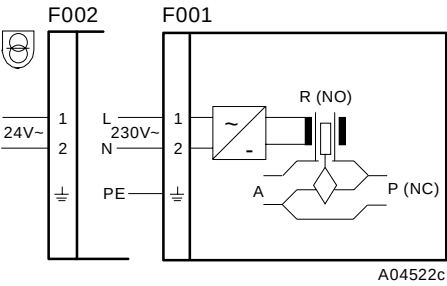

Dimension drawing

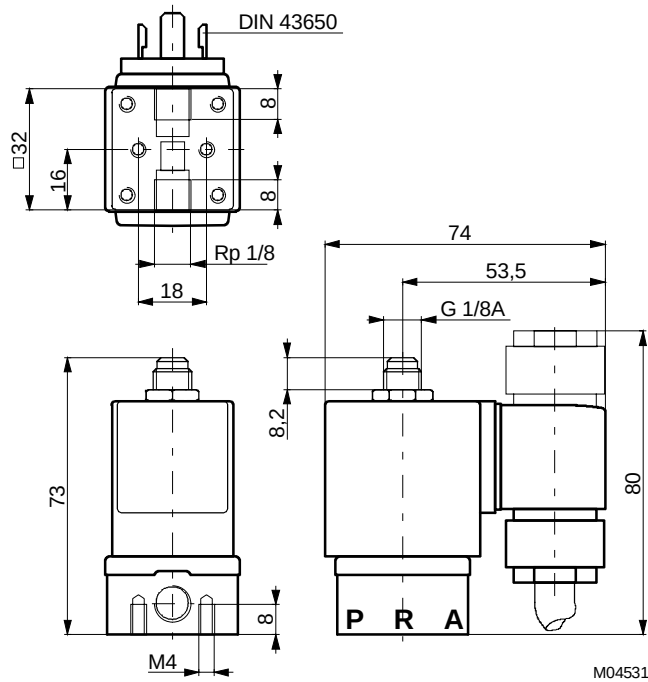

Accessories

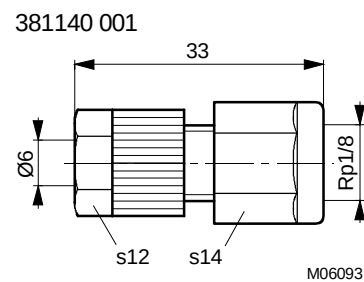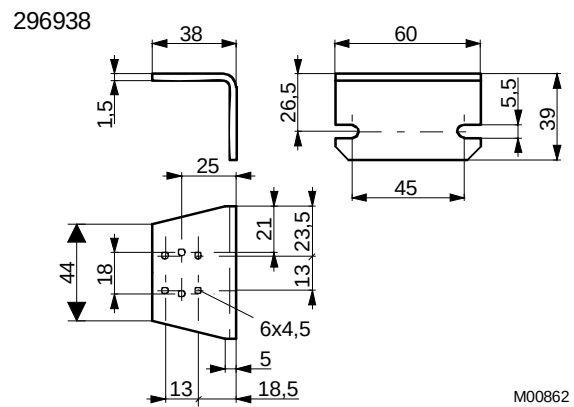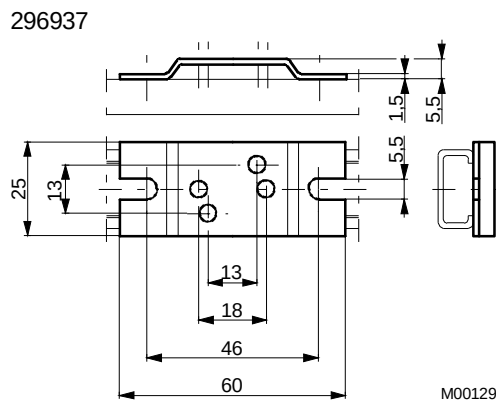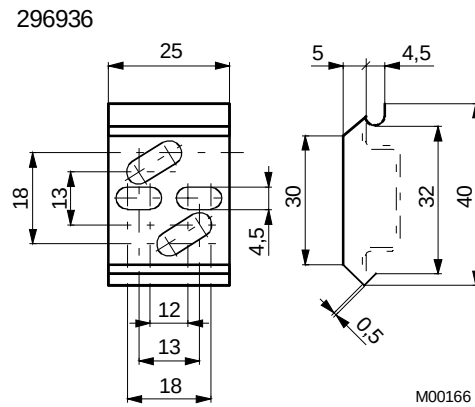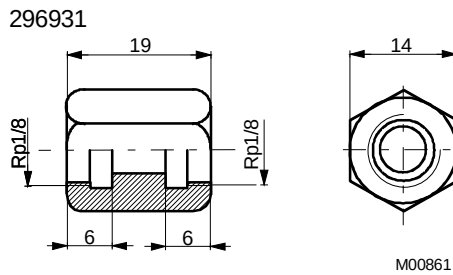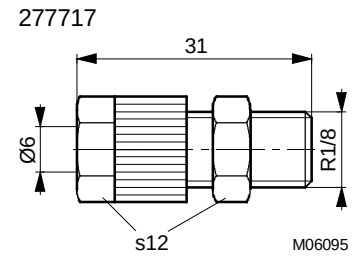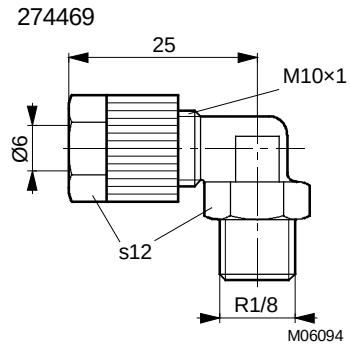

Printed in Switzerland
 Right of amendment reserved
 N.B.: A comma between cardinal
 numbers denotes a decimal point
 © Fr. Sauter AG, CH-4016 Basle
 7165052003 04